



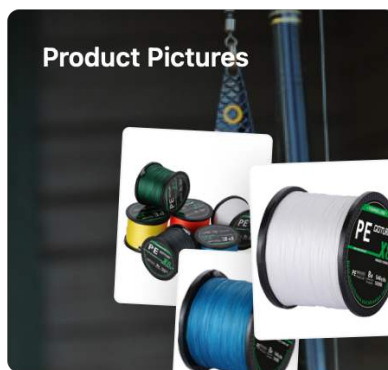

## SYGD10130

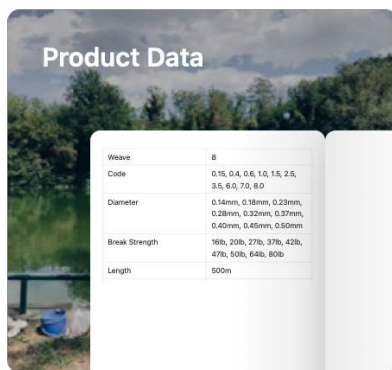

### Product Data

Weave	8
Code	0.15, 0.4, 0.6, 1.0, 1.5, 2.5, 3.5, 6.0, 7.0, 8.0
Diameter	0.14mm, 0.18mm, 0.23mm, 0.28mm, 0.32mm, 0.37mm, 0.40mm, 0.45mm, 0.50mm
Break Strength	16lb, 20lb, 27lb, 37lb, 42lb, 47lb, 50lb, 64lb, 80lb
Length	500m
Custom MOQ	500pcs
Custom Price	Depends on different options, 3%-10% higher than basic price
Lead Time	30-45 days

### Product Pictures



NUMBER	0.8	1.2	2.0	3.0	4.0	5.0	6.0	7.0	8.0
WEAVE	8	8	8	8	8	8	8	8	8
DIA. (mm)	0.14	0.18	0.23	0.28	0.32	0.37	0.40	0.46	0.50
TEST (LB)	16	20	27	37	42	47	50	64	80
ILB (KG)	7.3	9.0	12.3	16.8	18.9	21.0	22.7	29.2	36.4

Great strength.

**FASTER CUTTING & WATERPROOF**

- Compacted, low water absorption and faster cutting water.

**8 STRANDS LINE**

- High strength, ultra-sensitivity and smooth casting

It's suitable for bait casting reels, in particular for trolling.

**COLORFAST & KNOT WELL**

- Advanced dyeing technology with special coating. It is colorfast and knot excellent.

**SUPERIOR ABRASION**

- 8 braided line, superior abrasion resistance and no burr, durable for long term.

**TEST (LB)**

- Ultra-low stretch, small diameter

**PK**

**8 Strands :**

- Tightly, smooth and strong, protecting the guide rings from being damaged

**4 Strands :**

- The guide rings can be easily damaged

**>> AMAZING ABRASION RESISTANCE!**