



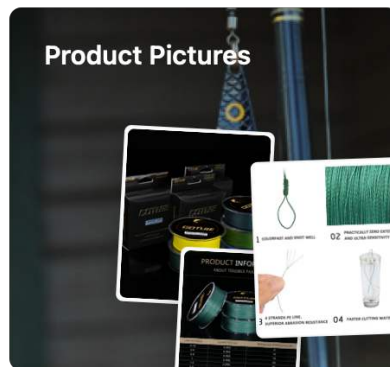

SYGD10143

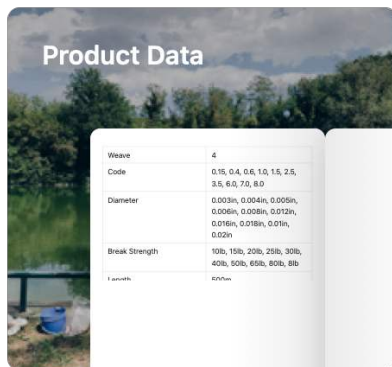

Product Data

Weave	4
Code	0.15, 0.4, 0.6, 1.0, 1.5, 2.5, 3.5, 6.0, 7.0, 8.0
Diameter	0.003in, 0.004in, 0.005in, 0.006in, 0.008in, 0.012in, 0.016in, 0.018in, 0.01in, 0.02in
Break Strength	10lb, 15lb, 20lb, 25lb, 30lb, 40lb, 50lb, 65lb, 80lb, 8lb
Length	500m
Custom MOQ	500pcs
Custom Price	Depends on different options, 3%-10% higher than basic price
Lead Time	30-45 days

Product Pictures



PRODUCT INFORMATION

ABOUT TENSIBLE PARAMETERS



LINE NUMBER	DIAMETER(IN)	BREAKING STRENGTH(LB)
0.15	0.003	6
0.4	0.004	10
0.6	0.005	15
1	0.006	20
1.5	0.008	25
2.5	0.01	30
3.5	0.012	40
6	0.016	60
7	0.018	65
8	0.02	80



01 COLORFAST AND KNOT WELL



02 PRACTICALLY ZERO EXTENSIBILITY AND ULTRA-SENSITIVITY



03 4 STRANDS PE LINE, SUPERIOR ABRASION RESISTANCE



04 FASTER CUTTING WATER

01

ADVANCED BRAIDED TECHNOLOGY

For ultra-sensitivity and smooth casting, reduce resistance greatly in the water. Low memory for outstanding castability and handling.

©2019 GOTURE LTD.



