



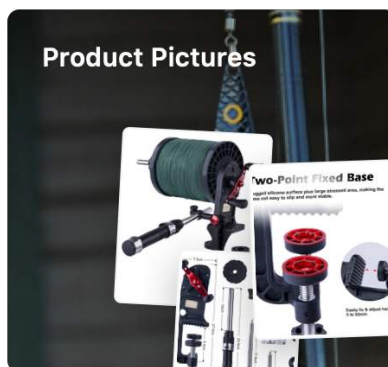

SYGE10531

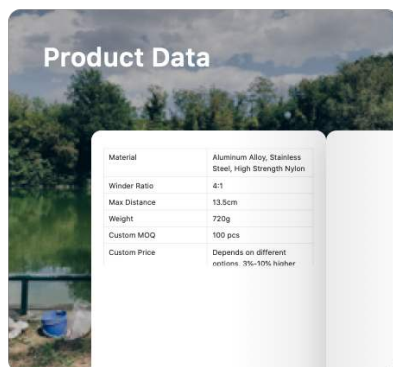

Product Data

Material	Aluminum Alloy, Stainless Steel, High Strength Nylon
Winder Ratio	4:1
Max Distance	13.5cm
Weight	720g
Custom MOQ	100 pcs
Custom Price	Depends on different options, 3%-10% higher than basic price
Lead Time	30-45 days

Product Pictures



Two-Point Fixed Base

Rugged silicone surface plus large stressed area, making the base not easy to slip and more stable.



High-Speed Winding

Winder Ratio **4:1**



Fit for Various Line Spools

Choose right threaded rod for your large or small spools.



Base

Goture:

► Stable

Others:

► Easy to slip

VS

Lock Nut

Goture:

► Two nuts, double fixation

Others:

► Insecure, easy to slip

VS

Threaded Rod

Goture:

► Apply to various spools

Others:

► Only for small spools

VS

Premium **Stainless Steel** Rod, Stronger Than Aluminum Alloy

User-Friendly **Double Rocker** Design

Deepened Teeth for Better Fixing

Rugged Silicone Surface, Increasing Friction

Installation Steps

